




REV	Revision Note	DATE	DRAWN	APPROVED

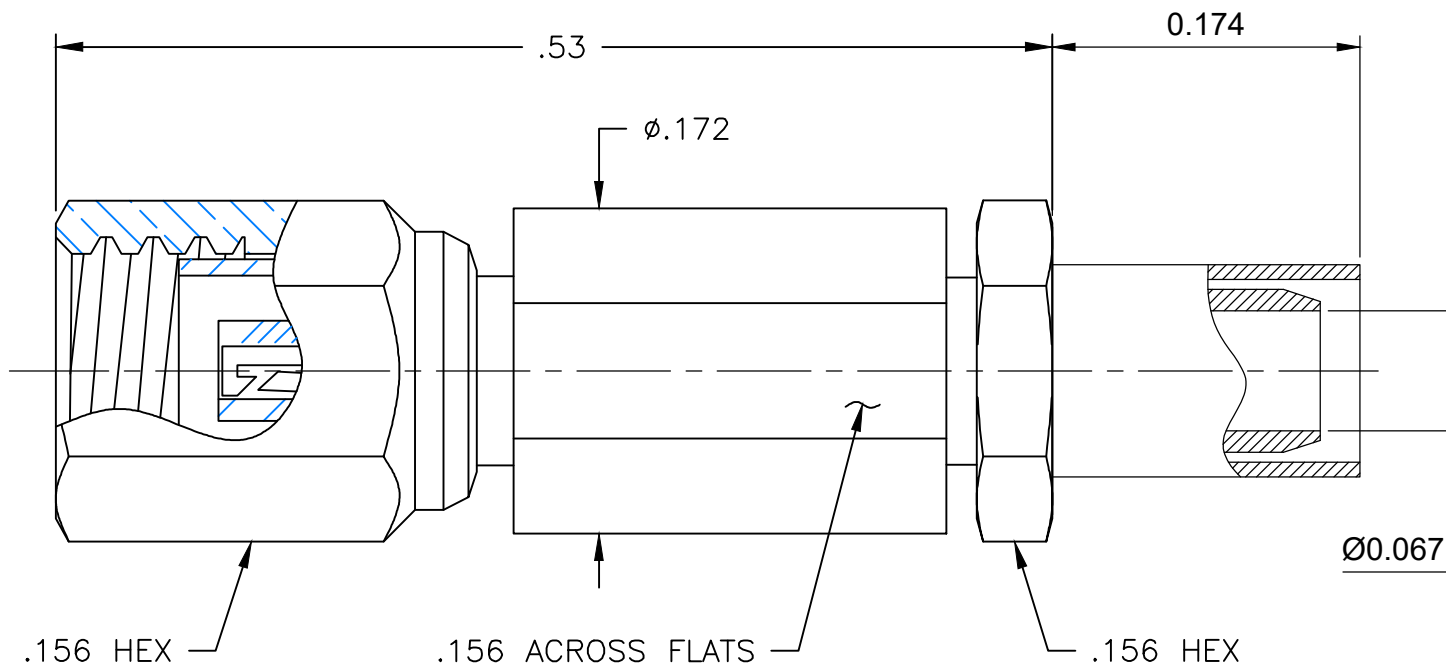

NOTES:

- 1.Temperature range:-45~+85°C;
- 2.Characteristic impedance:50Ω;
- 3.Ferquency range:DC~4GHz;
- 4.Dielectric withstanding voltage:750V rms;
- 5.Working Voltage:500V;
- 5.Insulation resistance:≥1000MΩ;
- 6VSWR:≤1.3(DC~3GHz);
- 7.Durability:500 cycles;
- 8.Salt spray:48h
- 9.RoHs compliant.

NO.	Description	Material	Finish	Q'TY
4	Nut	Brass	Gold	1
3	Body	Brass	Gold	1
2	Insulators	PTFE		1
1	Center Contact	Phosphor Bronze Beryllium Bronze	Gold	1

Materials and surface treatment

Unless otherwise
specified tolerance

>120~400	±1.0
>30~120	±0.6
>6~30	±0.4
0.5~6	±0.2
Ang	±1°

UNITS: inch

VIEW PROJECTION:



常州市新盛电器有限公司
Changzhou XinSheng Electronics CO.,LTD.

TITLE:

SSMC Female For RD316

SCALE:

1:1

Designed

DJ.Dong

DWG NO.

21Y000W2500

SHEET:

1

Checked

DJ.Dong

Approved

ZB.Bai

PART NO.

7002-1572-019

REV:

A

Date

23.08.04