




7		8		
REV	Revision Note	DATE	DRAWN	APPROVED

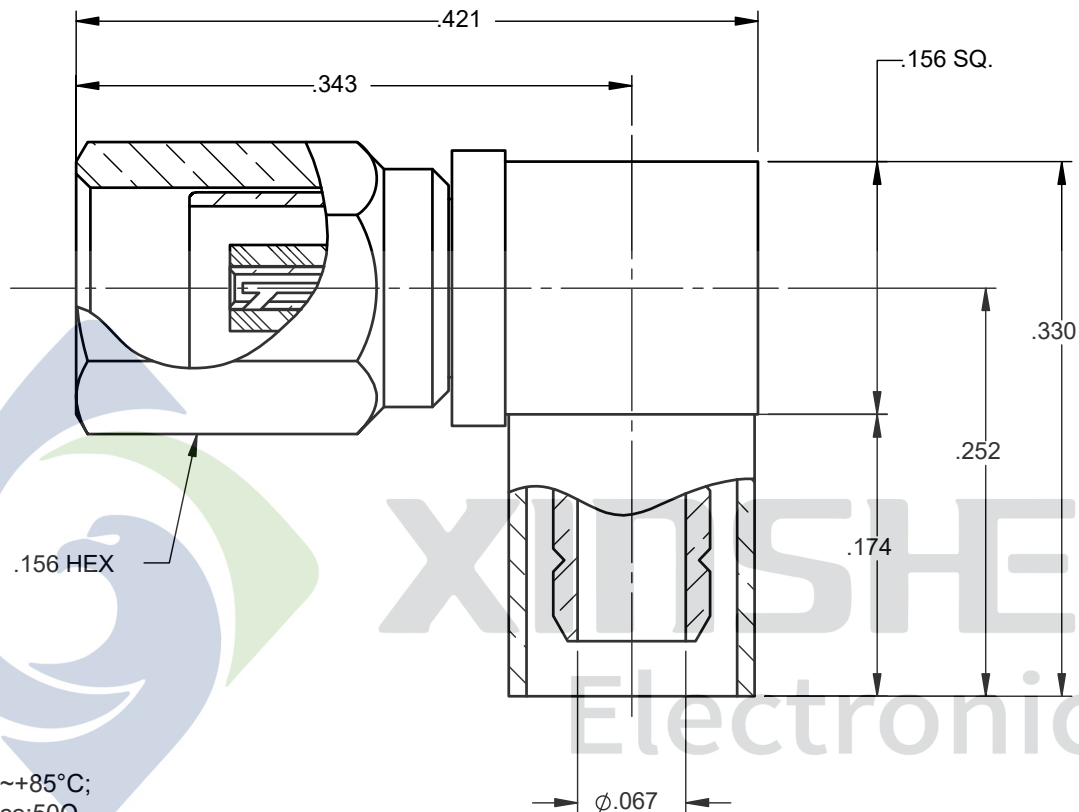

NOTES:

- 1.Temperature range:-45~+85°C;
- 2.Characteristic impedance:50Ω;
- 3.Ferquency range:DC~4GHz;
- 4.Dielectric withstanding voltage:750V rms;
- 5.Working Voltage:500V;
- 5.Insulation resistance:≥1000MΩ;
- 6.VSWR:≤1.3(DC~2.5GHz);
- 7.Durability:500 cycles;
- 8.Salt spray:48h
- 9.RoHs compliant.

NO.	Description	Material	Finish	Q'TY
4	Nut	Brass	Gold	1
3	Body	Brass	Gold	1
2	Insulators	PTFE		1
1	Center Contact	Phosphor Bronze Beryllium Bronze	Gold	1
Materials and surface treatment				

Unless otherwise specified tolerance	
>120~400	±1.0
>30~120	±0.6
>6~30	±0.4
0.5~6	±0.2
Ang	±1°
UNITS: inch	
VIEW PROJECTION:	

		常州市新盛电器有限公司 Changzhou XinSheng Electronics CO.,LTD.	
TITLE:		SSMC Female R/A For RD316	SCALE: 1:1
Designed		DJ.Dong	DWG NO. 21Y000V4400
Checked		DJ.Dong	SHEET: 1
Approved		ZB.Bai	PART NO. 7105-1521-019
Date		23.08.04	REV: A