




REV	Revision Note	DATE	DRAWN	APPROVED

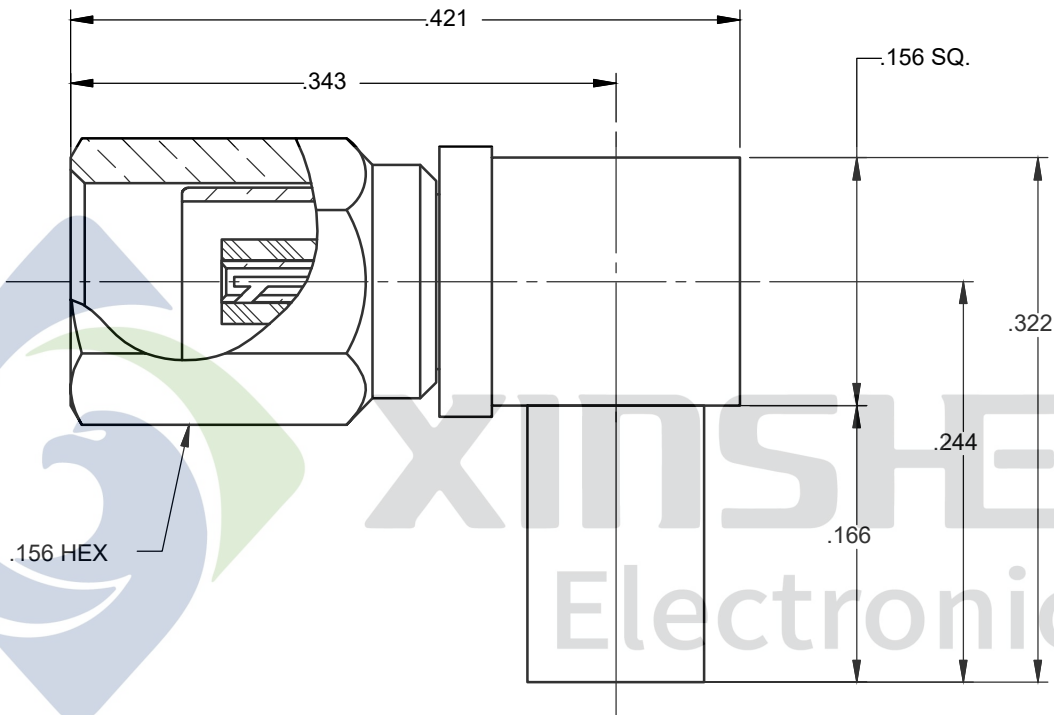

NOTES:

- 1.Temperature range:-45~+85°C;
- 2.Characteristic impedance:50Ω;
- 3.Ferquency range:DC~4GHz;
- 4.Dielectric withstanding voltage:750V rms;
- 5.Working Voltage:500V;
- 5.Insulation resistance:≥1000MΩ;
- 6VSWR:≤1.3(DC~2.5GHz);
- 7.Durability:500 cycles;
- 8.Salt spray:48h
- 9.RoHs compliant.

4	Nut	Brass	Gold	1
3	Body	Brass	Gold	1
2	Insulators	PTFE		1
1	Center Contact	Phosphor Bronze Beryllium Bronze	Gold	1
NO.	Description	Material	Finish	Q'TY
Materials and surface treatment				

Unless otherwise specified tolerance	
>120~400	±1.0
>30~120	±0.6
>6~30	±0.4
0.5~6	±0.2
Ang	±1°
UNITS: inch	
VIEW PROJECTION:	



常州市新盛电器有限公司
Changzhou XinSheng Electronics CO.,LTD.

TITLE:		SSMC Female R/A For 0.086		SCALE:
Designed		DJ.Dong	DWG NO.	1:1
Checked		DJ.Dong	21Y00124400	
Approved		ZB.Bai	SHEET:	
Date		23.08.04	PART NO.	
			7105-1561-010	
			REV:	
			A	