REV	Revision Note	DATE	DRAWN	APPROVED

ROHS
COMPLIANT
2002/95/EC

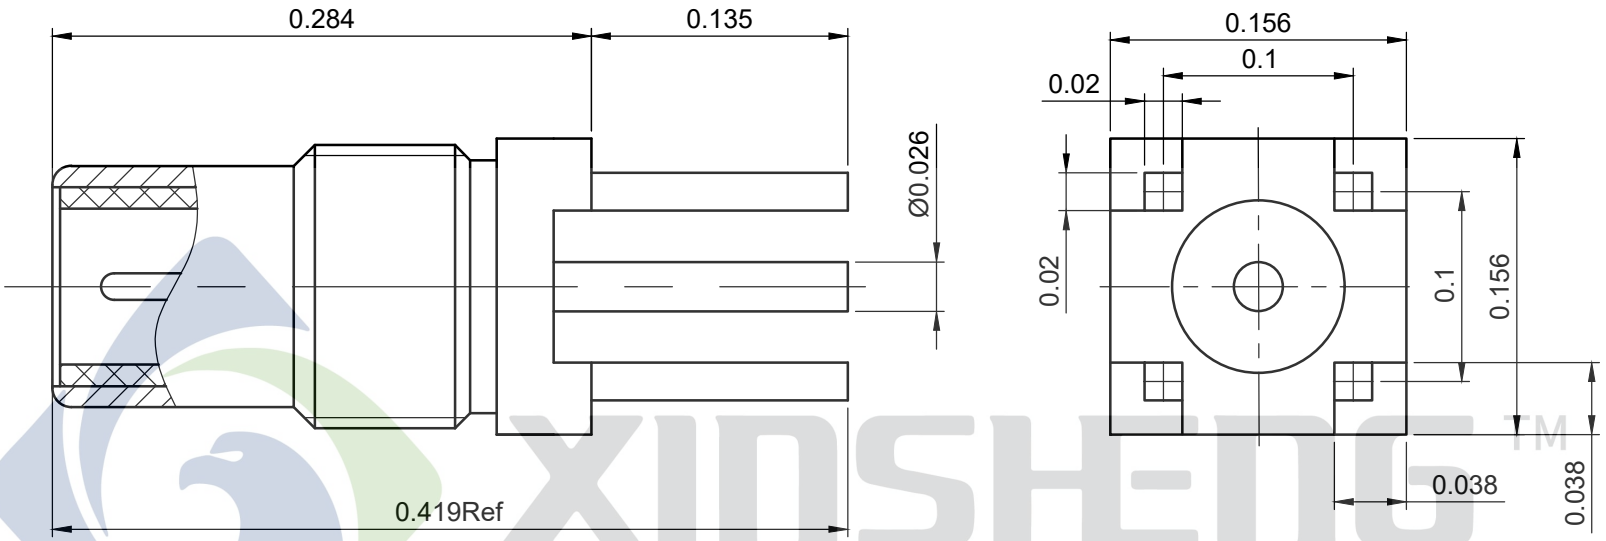

XINSHENG™
Electronics

NOTES:
1.Temperature range:-45~+85°C;
2.Characteristic impedance:50Ω;
3.Ferquency range:DC~4GHz;
4.Dielectric withstanding voltage:750V rms;
5.Working Voltage:500V;
5.Insulation resistance:≥1000MΩ;
6VSWR:≤1.3(DC~3GHz);
7.Durability:500 cycles;
8.Salt spray:48h
9.RoHs compliant.

NO.	Description	Material	Finish	Q'TY
3	Body	Brass	Gold	1
2	Insulators	PTFE		1
1	Center Contact	Phosphor Bronze	Gold	1

Materials and surface treatment

Unless otherwise specified tolerance	
>120～400	±1.0
>30～120	±0.6
>6～30	±0.4
0.5～6	±0.2
Ang	±1°

UNITS: inch

VIEW PROJECTION:

常州市新盛电器有限公司
Changzhou XinSheng Electronics CO.,LTD.

TITLE:	SSMC -KE-3.95		SCALE: 1:1
Designed	DJ.Dong	DWG NO. 21Y000Y1300	SHEET: 1
Checked	DJ.Dong		
Approved	ZB.Bai	PART NO. 7009-1511-050	REV: A
Date	23.08.04		